

HARDWARE FEATURES

- Thoughtful construction - contoured back walls, urethane coated envelope, textured powder coated enclosure
- High durability, low maintenance design

RESULTING IN...


- + Superior surface finish
- + Evenly treated parts
- + Cycle time reduction

SOFTWARE FEATURES

- Intelligent cycle times
- Variable detergent dosing
- HMI for system control and monitoring

RESULTING IN...

- + Minimized part breakage
- + Minimal operator intervention
- + Preservation of fine-feature details

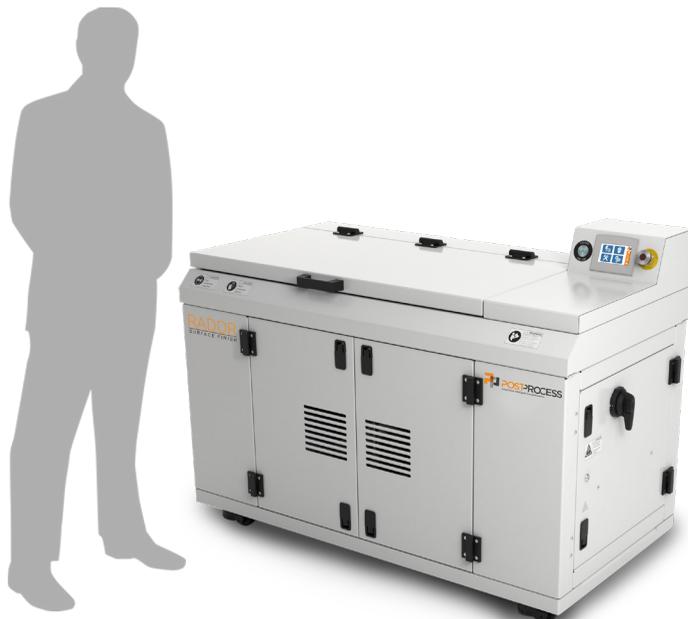

PRODUCT SPECIFICATIONS

SIZE AND WEIGHT

- Envelope: 21.4" L x 8.8" W x 13" H
(54 cm x 22 cm x 33 cm)
- Volume of parts should not exceed 1/3rd of envelope
- Machine Footprint:
– 54.3" L x 28.3" W x 39.4" H
(137 cm x 72 cm x 100 cm)
- Approx. Weight: 640 lbs. empty (290 kg);
730 lbs. full (331 kg)

ELECTRICAL

US

- Voltage: 120V
- Amperage: 15A
- Connector: NEMA 5-15P

EU

- Voltage: 230V
- Amperage: 16A
- Connector: CEE 7/7


CONSUMABLES

- Abrasive and polishing media
- PLM-001-SURF Detergent

SAFETY FEATURES

- Multi-position, self-supporting hinged lid
- Emergency stop
- Auto power down
- Compliant with all OSHA regulations
- **CE**

MATERIALS AND TECHNOLOGIES

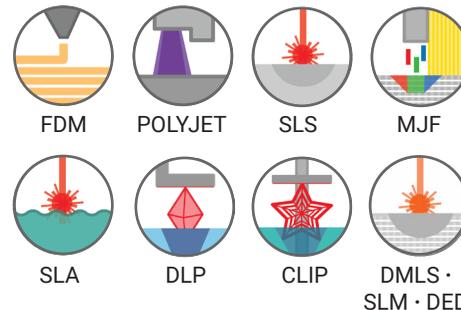

POSTPROCESS TECHNOLOGIES INC.

2495 Main Street, Suite 615, Buffalo NY 14214 USA
info@postprocess.com +1.866.430.5354

POSTPROCESS TECHNOLOGIES INTERNATIONAL

535 Route des Lucioles 06560 Sophia Antipolis, France
+33 (0)4 22 32 68 13